




JIS マークの製品 差し込み溶接式高圧継手 (JIS B2316) : 異径 ティー
Products of JIS MARK : REDUCING TEE

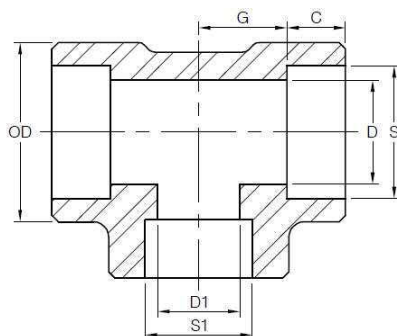

S80

単位 : mm

径の呼び		差し込み部の 内径		内径		差し込み 部の深さ C (Min)	中心から 差し込み 部底面ま での距離 G	外径 OD
A	B							
DN	Nom. Pipe Size	S	S1	D	D1			
15 x10	1/2 x3/8	22.2	17.8	16.1	14.5	9.6	15.9	33.0
20 x10	3/4 x3/8	27.7	17.8	21.4	14.5	12.7	19.1	38.0
20 x15	3/4 x1/2	27.7	22.2	21.4	16.1	12.7	19.1	38.0
25 x10	1 x3/8	34.5	17.8	27.2	14.5	12.7	22.2	46.0
25 x15	1 x1/2	34.5	22.2	27.2	16.1	12.7	22.2	46.0
25 x20	1 x3/4	34.5	27.7	27.2	21.4	12.7	22.2	46.0
32 x15	1-1/4 x1/2	43.2	22.2	35.5	16.1	12.7	27.0	56.0
32 x20	1-1/4 x3/4	43.2	27.7	35.5	21.4	12.7	27.0	56.0
32 x25	1-1/4 x1	43.2	34.5	35.5	27.2	12.7	27.0	56.0
40 x15	1-1/2 x1/2	49.1	22.2	41.2	16.1	12.7	31.8	62.0
40 x20	1-1/2 x3/4	49.1	27.7	41.2	21.4	12.7	31.8	62.0
40 x25	1-1/2 x1	49.1	34.5	41.2	27.2	12.7	31.8	62.0
40 x32	1-1/2 x1-1/4	49.1	43.2	41.2	35.5	12.7	31.8	62.0
50 x20	2 x3/4	61.1	27.7	52.7	21.4	15.9	38.1	75.5
50 x25	2 x1	61.1	34.5	52.7	27.2	15.9	38.1	75.5
50 x40	2 x1-1/2	61.1	49.1	52.7	41.2	15.9	38.1	75.5
65 x25	2-1/2 x1	77.1	34.5	65.9	27.2	15.9	41.3	93.0
65 x32	2-1/2 x1-1/4	77.1	43.2	65.9	35.5	15.9	41.3	93.0
65 x40	2-1/2 x1-1/2	77.1	49.1	65.9	41.2	15.9	41.3	93.0
65 x50	2-1/2 x2	77.1	61.1	65.9	52.7	15.9	41.3	93.0
80 x32	3 x1-1/4	90.0	43.2	78.1	35.5	15.9	57.2	110.0
80 x40	3 x1-1/2	90.0	49.1	78.1	41.2	15.9	57.2	110.0
80 x50	3 x2	90.0	61.1	78.1	52.7	15.9	57.2	110.0
80 x65	3 x2-1/2	90.0	77.1	78.1	65.9	15.9	57.2	110.0