




(JIS マーク認証対象外)

ねじ込み式高圧継手 (ねじ規格 JIS B0203): 異径 ティー

High Pressure Fittings with threads: REDUCING TEE

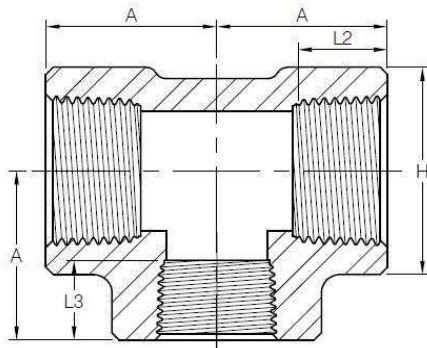

S80

単位: mm

径の呼び		中心から ねじ込み 部端面ま での距離 A	ねじの長さ		外径 H
A	B		L2	L3	
DN	Nom. Pipe Size				
15 x8	1/2 x1/4	28.0	14.9	11.4	33.0
15 x10	1/2 x3/8	28.0	14.9	12.4	33.0
20 x10	3/4 x3/8	33.0	16.8	12.4	38.0
20 x15	3/4 x1/2	33.0	16.8	14.9	38.0
25 x10	1 x3/8	38.0	19.6	12.4	46.0
25 x15	1 x1/2	38.0	19.6	14.9	46.0
25 x20	1 x3/4	38.0	19.6	16.8	46.0
32 x15	1-1/4 x1/2	44.0	21.9	14.9	56.0
32 x20	1-1/4 x3/4	44.0	21.9	16.8	56.0
32 x25	1-1/4 x1	44.0	21.9	19.6	56.0
40 x15	1-1/2 x1/2	51.0	22.7	14.9	62.0
40 x20	1-1/2 x3/4	51.0	22.7	16.8	62.0
40 x25	1-1/2 x1	51.0	22.7	19.6	62.0
40 x32	1-1/2 x1-1/4	51.0	22.7	21.9	62.0
50 x20	2 x3/4	60.0	23.9	16.8	75.5
50 x25	2 x1	60.0	23.9	19.6	75.5
50 x32	2 x1-1/4	60.0	23.9	21.9	75.5
50 x40	2 x1-1/2	60.0	23.9	22.7	75.5