




(JIS マーク認証対象外)

ねじ込み式高圧継手 (ねじ規格 JIS B0203): 六角ニップル

High Pressure Fittings with threads: HEX NIPPLE

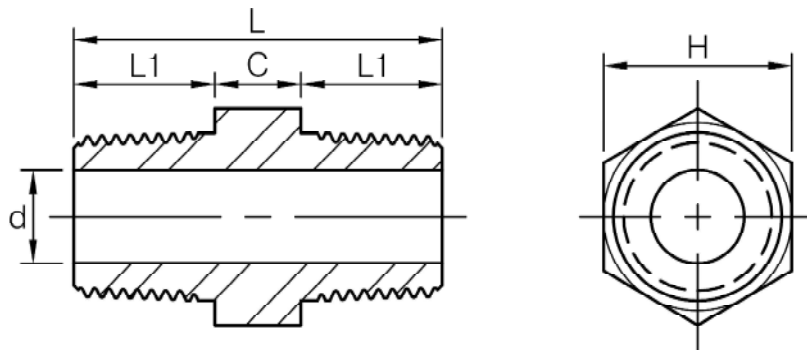

S80

単位: mm

径の呼び		C (Min)	ねじの長さ L1 (Min)	長さ L (Min)	内径 d	対辺の長さ H (Min)
A	B					
DN	Nom. Pipe Size					
6	1/8	6.0	10.0	26.0	5.0	11.0
8	1/4	6.0	15.0	36.0	8.0	15.0
10	3/8	8.0	16.0	40.0	11.0	18.0
15	1/2	8.0	20.0	48.0	14.0	22.0
20	3/4	10.0	21.0	52.0	19.0	27.0
25	1	10.0	25.0	60.0	24.0	35.0
32	1-1/4	14.0	25.0	64.0	29.5	46.0
40	1-1/2	16.0	26.0	68.0	38.0	50.0
50	2	17.0	27.0	71.0	49.0	62.0

備考: ねじは JIS B0203 或は JIS B0202 に準拠。

REMARK: Threads refer to JIS B0203 or JIS B0202.