




(JIS マーク認証対象外)
ねじ込み式高圧継手 (ねじ規格 JIS B0203): キャップ
High Pressure Fittings with threads: CAP

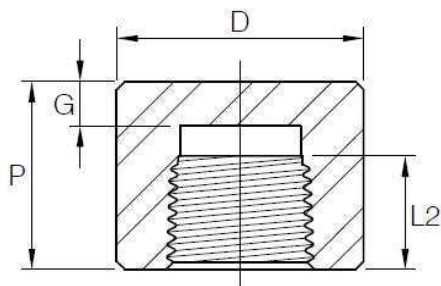

S80

単位: mm

径の呼び		長さ P	ねじの長さ L2	外径 D	ヘットの 厚さ G (Min)
A	B				
DN	Nom. Pipe Size				
6	1/8	19	8.8	19	3.5
8	1/4	19	11.4	22	4.5
10	3/8	22	12.4	25	5.0
15	1/2	25	14.9	32	6.1
20	3/4	28	16.8	38	7.0
25	1	33	19.6	46	8.3
32	1-1/4	36	21.9	55	9.6
40	1-1/2	40	22.7	65	10.5
50	2	44	23.9	75	12.2
65	2-1/2	50	30.5	95	15.3
80	3	57	32.8	110	17.3

S160

単位: mm

径の呼ぶ		長さ P	ねじの長さ L2	外径 D	ヘットの 厚さ G (Min)
A	B				
DN	Nom. Pipe Size				
15	1/2	27	14.9	35	7.2
20	3/4	30	16.8	42	8.8
25	1	36	19.6	51	10.6
32	1-1/4	39	21.9	60	11.8
40	1-1/2	43	22.7	68	13.3
50	2	49	23.9	84	16.4
65	2-1/2	54	30.5	105	19.2
80	3	63	32.8	118	22.5

備考: 製品は JIS B2316 に準拠。ねじは JIS B0203 或は JIS B0202 に準拠。

REMARK: Products refer to JIS B2316; Threads refer to JIS B0203 or JIS B0202.