

DSA** - R**

真直度
—
平面度

真円度

円筒度

平行度

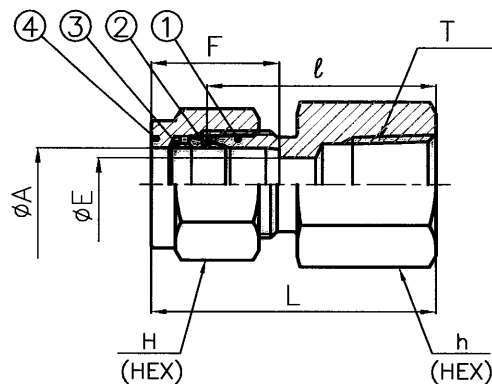
直角度

位置度

同軸度

対称度

振れ

Part No	A		T (R)	E	h (HEX)		H (HEX)		ℓ	L	F
	O.D.	mm			O.D.	mm	O.D.	mm			
DSA 6-R2 ss	3/8	9.53	1/8	7.1	5/8	15.88	11/16	17.46	25.4	32.9	17.0
DSA 6-R4 ss			1/4		3/4	19.05			30.2	37.7	
DSA 6-R6 ss			3/8		7/8	22.23			32.9	40.4	
DSA 6-R8 ss			1/2		1-1/16	26.99			36.5	44.0	
DSA 6-R12ss			3/4		1-5/16	33.34			40.3	47.8	
DSA 6-R16ss			1		1-5/8	41.28			47.6	55.1	
DSA 8-R2 ss	1/2	12.7	1/8	10.4	13/16	20.64	7/8	22.23	25.4	35.7	23.0
DSA 8-R4 ss			1/4		13/16	20.64			31.9	42.2	
DSA 8-R6 ss			3/8		7/8	22.23			32.9	43.2	
DSA 8-R8 ss			1/2		1-1/16	26.99			36.6	46.9	
DSA 8-R12ss			3/4		1-5/16	33.34			39.1	49.4	
DSA 8-R16ss			1		1-5/8	41.28			47.6	57.9	
DSA10-R6 ss	5/8	15.88	3/8	12.7	15/16	23.81	1	25.4	32.0	42.3	24.6
DSA10-R8 ss			1/2		1-1/16	26.99			36.6	46.9	
DSA10-R12ss			3/4		1-5/16	33.34			40.1	50.4	

△				
△				
△				
△				
△				
△	サイズ追加 - ③	09. 2.12	安達	ナガセ
△	24(1-1/2) 誤記修正 - ③	05.10.27	石山	ナガセ
記号	記	事	日付	変更確認
来歴	△ サイズ追加による全面書換			

関 連 図 番			
普通寸法差 (削り加工) (中級)			
寸法区分 mm	寸法差 mm	寸法区分 mm	寸法差 mm
1以上 4以下	± 0.1	2500以上 10000以下	± 0.8
4以上 16以下	± 0.2	1000 以上 2000 以下	± 1.0
16以上 63以下	± 0.3	2000 以上 4000 以下	± 1.5
63以上 250以下	± 0.4		

④		ナット	1	SUS316	
③		バックフェルル	1	SUS316	
②		フロントフェルル	1	SUS316	
①		本 体	1	SUS316	
品番	図 番	名 称	個数	材 質	備 考
材質		素 材 寸 法	処 理		
検 図	長 17.531 瀬	承 認 鈴 17.531 木	BI-LOK<INCH> DSA** - R** ss ② Rメスコネクター(3/8~5/8OD)		
設 計	—	製 図 安達 17.531 義紀	尺 度 NTS	図 番	DSA** - R** 
イハラサイエンス株式会社					