

真直度
—
平面度

真円度

円筒度

平行度

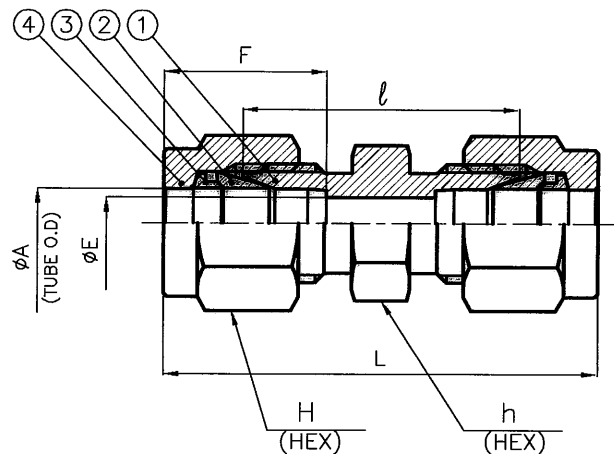
直角度

位置度

同軸度

対称度

振れ

Part No	A TUBE OD		E	h (HEX)		H (HEX)		I	L	F
	inch	mm		inch	mm	inch	mm			
DUA 1 ss	1/16	1.59	1.3	5/16	7.94	5/16	7.94	17.5	25.5	8.9
DUA 2 ss	1/8	3.18	2.3	7/16	11.11	7/16	11.11	22.4	35.8	13.0
DUA 3 ss	3/16	4.76	3.0	7/16	11.11	1/2	12.7	24.0	37.4	13.8
DUA 4 ss	1/4	6.35	4.8	1/2	12.7	9/16	14.29	26.1	41.1	15.4
DUA 5 ss	5/16	7.94	6.4	9/16	14.29	5/8	15.88	28.0	43.0	16.3
DUA 6 ss	3/8	9.53	7.1	5/8	15.88	11/16	17.46	30.2	45.2	17.0
DUA 8 ss	1/2	12.7	10.4	13/16	20.64	7/8	22.23	31.0	51.6	23.0
DUA10 ss	5/8	15.88	12.7	15/16	23.8	1	25.4	31.8	52.4	24.6
DUA12 ss	3/4	19.05	15.8	1-1/16	26.99	1-1/8	28.58	33.3	53.9	24.6
DUA14 ss	7/8	22.23	18.3	1-3/16	30.16	1-1/4	31.75	35.0	55.4	26.1
DUA16 ss	1	25.4	22.5	1-3/8	34.93	1-1/2	38.1	40.5	65.7	31.6
 DUA 20 ss	1-1/4	31.75	27.8	1-3/4	44.45	1-7/8	47.63	48.0	~~70.1~~ 92.2	41.1
 DUA 24 ss	1-1/2	38.1	34.0	2-1/8	54.0	2-1/4	57.15	53.6	~~80.8~~ 108.0	50.0
 DUA 32 ss	2	50.8	46.0	2-3/4	70.0	3	76.2	74.7	149.3	67.5

				
				
				
				
				
	寸法誤記訂正	'04.6.25	仲島	ナガセ
	寸法誤記訂正	'03.4.29	菊池	ナガセ
記号	記	事	日付	変更確認
来歴	 サイズ追加による全面書換			

関 連 図 番			
普通寸法差 (削り加工) (中級)			
寸法区分 mm	寸法差 mm	寸法区分 mm	寸法差 mm
1以上 4以下	± 0.1	250以上 1000以下	± 0.8
4以上 16以下	± 0.2	1000以上 2000以下	± 1.0
16以上 63以下	± 0.3	2000以上 4000以下	± 1.5
63以上 250以下	± 0.4		

		ナット	2	SUS316	
		バックフェルル	2	SUS316	
		フロントフェルル	2	SUS316	
		本 体	1	SUS316	
品番	図 番	名 称	個数	材 質	備 考
材質		素材寸法	処 理		
検 図		承認		DUA ※※ ss	
設 計	—	製 図		尺 度	NTS
				図 番	DUA ※※ 
				イハラサイエンス株式会社	