


銅管材質 : りん脱酸銅継目無管 (JIS H3300 C1220T)
保温材 : 化学架橋ポリエチレンフォーム 30倍発泡 (JIS A9511 A-PE-C-2準拠品)

MATERIALS : PHOSPHORUS DEOXIDIZED COPPER SEAMLESS PIPE (JIS H3300 C1220T)
INSULATION : CHEMICAL CROSS-LINKED 30-TIME FOAMED POLYETHYLENE (JIS A9511 A-PE-C-2)

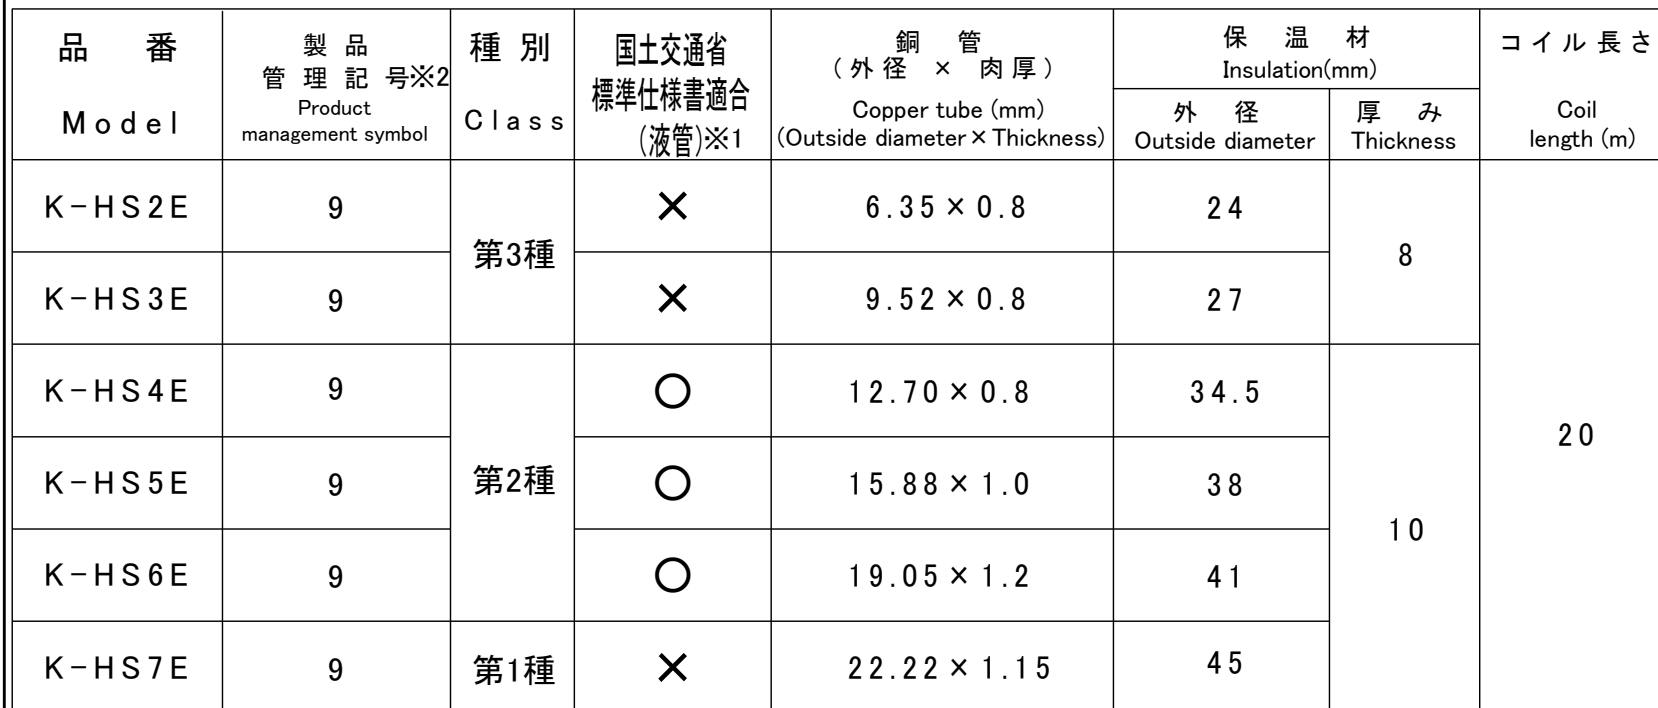

種別 Class	最高使用圧力 Maximum allowable working pressure	対応冷媒 Refrigerant
第1種	3.45MPa	R407C,R22 etc.
第2種	4.30MPa	R32,R410A,R407C etc.
第3種	4.80MPa	R32,R410A,R407C etc.

Note)
 ※1: ○ = Japanese Ministry of Land & Infrastructure Transport
 Specifications (only when you use for a liquid pipe)
 ※2: This last number 9 printed on a packing case is product management symbol.

[illegible]