


銅管材質 : りん脱酸銅継目無管 (JIS H3300 C1220T)  
 保温材 : 化学架橋ポリエチレンフォーム 30倍発泡 (JIS A9511 A-PE-C-2準拠品)

MATERIALS : PHOSPHORUS DEOXIDIZED COPPER SEAMLESS PIPE (JIS H3300 C1220T)  
INSULATION : CHEMICAL CROSS-LINKED 30-TIME FOAMED POLYETHYLENE (JIS A9511 A-PE-C-2)

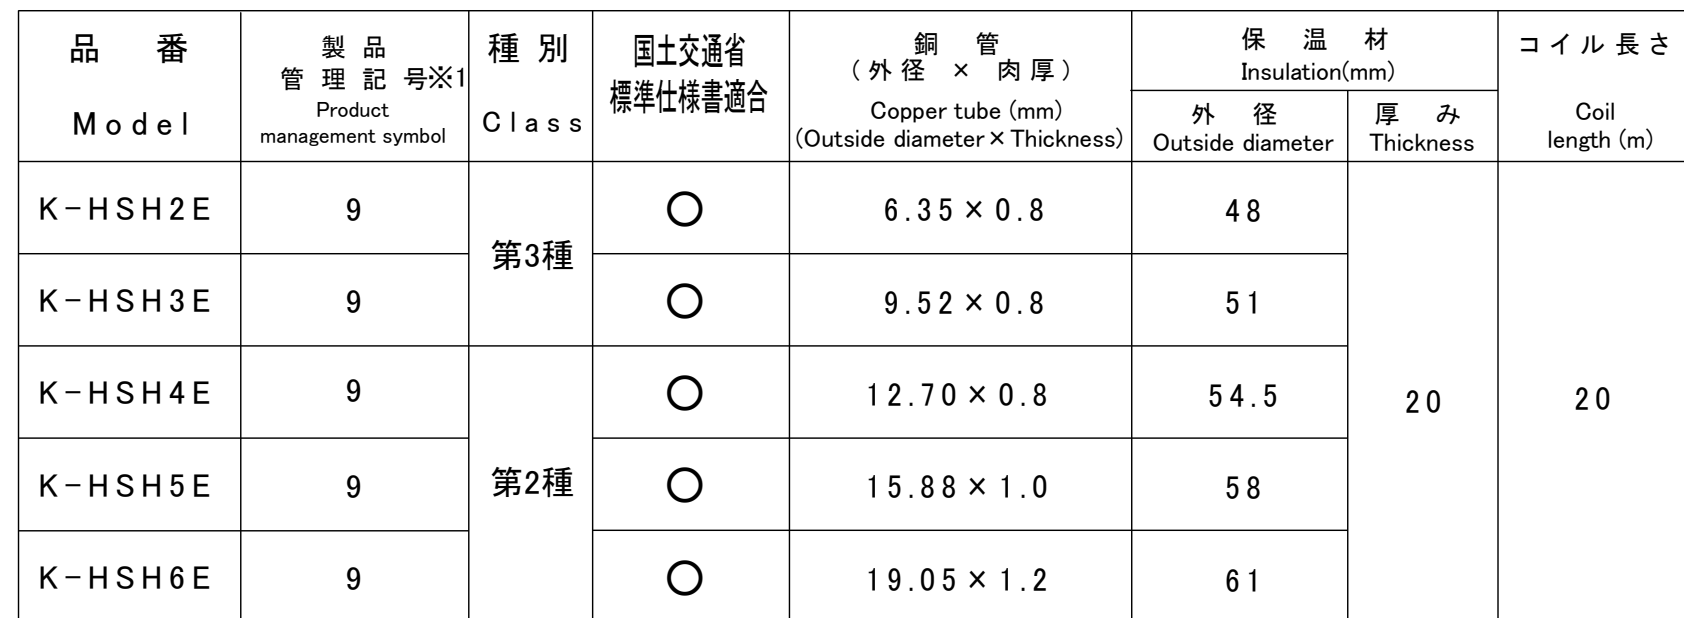

| 種別<br>Class | 最高使用圧力<br>Maximum allowable working pressure | 対応冷媒<br>Refrigerant  |
|-------------|----------------------------------------------|----------------------|
| 第2種         | 4.30MPa                                      | R32,R410A,R407C etc. |
| 第3種         | 4.80MPa                                      | R32,R410A,R407C etc. |

Note)※1:This last number 9 printed on a packing case is product management symbol.  
(The thickness ratio of inner-layer to outer-layer is different due to product management symbol.)

[illegible]