


- * Thread standard: JIS.B 0203 (ISO 7-1)
- * Connecting thread: Rc
- * Test Pressure(MPa): JIS B 2003


Air pressure 0.6Mpa

RANGE OF USE		
Media	Temperature	Pressure
Water	0℃-183℃	≦4.11 MPa
Steam	100℃-183℃	≦0.98 MPa
Air	-5℃-80℃	≦0.98 MPa
Gas	-5℃-80℃	≦0.98 MPa

ITEM	PARTS	MATERIAL
1	BODY	SCS13A
2	CAP	SCS13A
3	SCREEN	SUS304
4	GASKET	PTFE

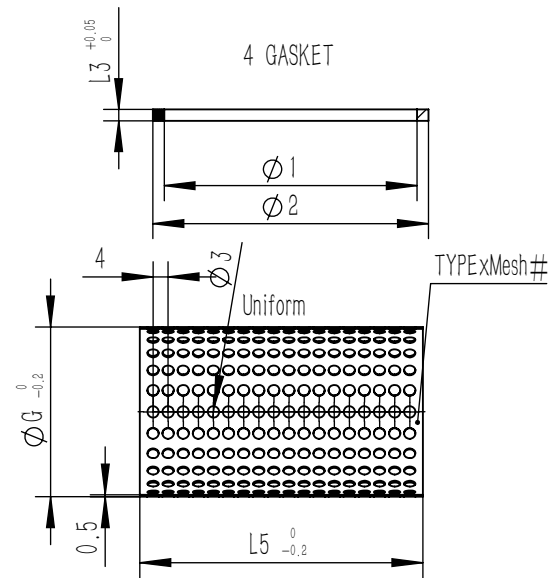


SIZE×Mesh# Inkjet

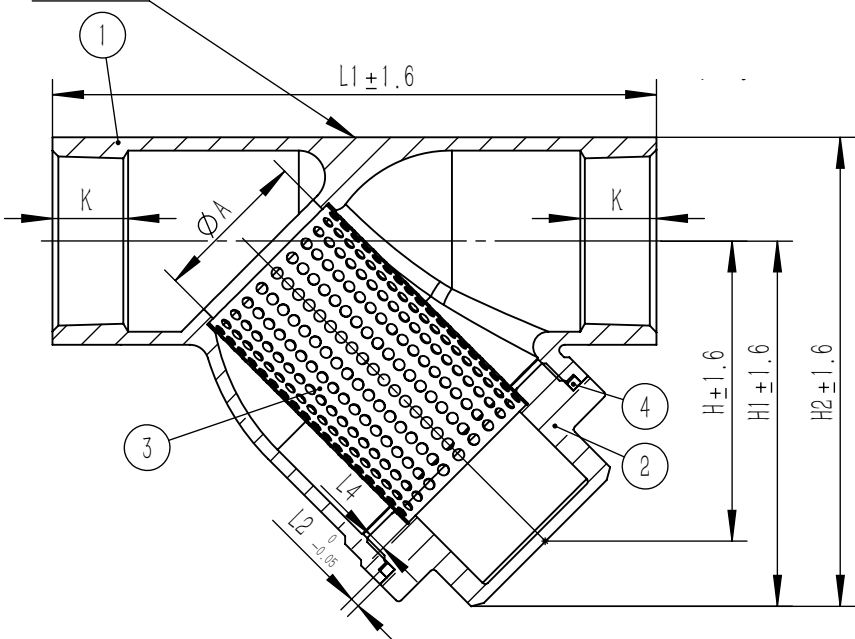

MARKING ON THE BODY:

- * LOGO AS PROVIDED
- * ARROW CAST ON BODY START FROM WATER COMING END

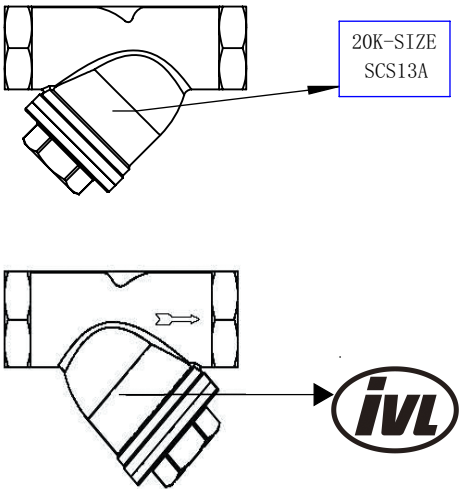

TYPE	SIZE	A	L1	H	H1	H2	Ø1	Ø2	L2	L3	L4	L5	ØG	K			重量
08A	1/4"	8	65	41	48	61	32.5	34.5	1.5	2	4.5	45	18	10.8			0.28
10A	3/8"	15	70	41	48	61	32.5	34.5	1.5	2	4.5	45	18	11.1			0.28
15A	1/2"	15	85	41	48	61	32.5	34.5	1.5	2	4.5	45	18	16.4			0.3
20A	3/4"	22	100	51	60	76	40	44	2.5	3	5	50	24.5	17.8			0.5
25A	1"	29	115	60	70	90	46.5	50.5	2.5	3	6	60	32	20.9			0.75
32A	1 1/4"	36	135	71.5	85	109	57	61	2.5	3	5	70	40	23.2			1.17
40A	1 1/2"	41	150	79.5	96	123	69	73	2.5	3	5	75	45	23.2			1.72
50A	2"	52	180	95.8	115.6	148.6	85	89	2.5	3	5	90	56	27.5			2.67

Mesh	40	60	80	100	200
Diameter	0.254	0.168	0.127	0.114	0.075
Material	304	304	304	304	304

* This product does not contain asbestos

JIS20K ステンレス製ねじ込み式Y形ストレイナー

DESIGNER				I-IVL-0009
CHECK	K.ITO	APPLY		
FILE NO.		SIGNATURE		ITEM NO. SYST
REMARK		STANDARD		
DATE	2017. 3. 1	WEIGHT		
PAGE	PAGE 1 OF 1	RATE	1:2	

ivalue

イシグロ株式会社