


ME メールエルボ

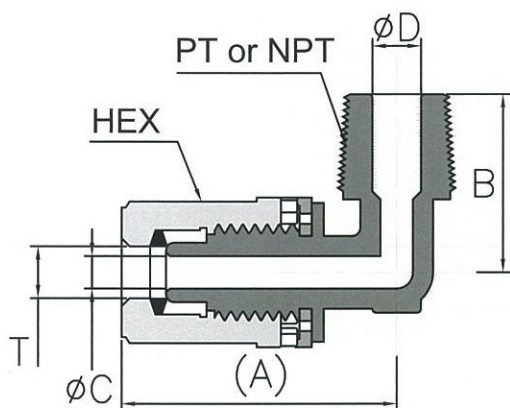

INCH+NPT TYPE

	T	NPT	HEX	(A)	B	ØC	ØD	W
ME-H1-N1	3.18X2.18	1/8"	11	25.8	17.5	2	3	7.6
ME-H1-N2	"	1/4"	"	"	21.5	"	6	"
ME-H2-N1	6.35X3.95	1/8"	16	34	18	4	3	10
ME-H2-N2	"	1/4"	"	"	22	"	6	"
ME-H2-N3	"	3/8"	"	"	"	"	10	"
ME-H3-N2	9.53X6.35	1/4"	19	40.2	24	6.3	6	14
ME-H3-N3	"	3/8"	"	"	"	"	10	"
ME-H3-N4	"	1/2"	"	"	27.8	"	12	"
ME-H4-N2	12.7X9.53	1/4"	24	48.5	26.5	10	6	18
ME-H4-N3	"	3/8"	"	"	"	"	10	"
ME-H4-N4	"	1/2"	"	"	30.3	"	12	"
ME-H4-N6	"	3/4"	"	"	30.6	"	16	"
ME-H6-N4	19.05X15.8	1/2"	32	61.5	34.8	16	12	27
ME-H6-N6	"	3/4"	"	"	37.1	"	16	"
ME-H8-N6	25.4X22.2	"	41	73.1	42.1	22	"	34
ME-H8-N8	"	1"	"	"	46.4	"	22	"

MM+PT TYPE

	T	PT	HEX	(A)	B	ØC	ØD	W
ME-M3-R1	3X2	1/8"	11	25.8	17.5	2	3	7.6
ME-M3-R2	"	1/4"	"	"	21.5	"	6	"
ME-M4-R1	4X3	1/8"	"	"	17.5	3	3	"
ME-M4-R2	"	1/4"	"	"	21.5	"	6	"
ME-M6-R1	6x4	1/8"	16	34	18	4	3	10
ME-M6-R2	"	1/4"	"	"	22	"	6	"
ME-M6-R3	"	3/8"	"	"	"	"	10	"
ME-M8-R1	8x6	1/8"	19	40.2	20	6.3	3	14
ME-M8-R2	"	1/4"	"	"	24	"	6	"
ME-M8-R3	"	3/8"	"	"	"	"	10	"
ME-M8-R4	"	1/2"	"	"	27.8	"	12	"
ME-M10-R2	10x8	1/4"	"	"	24	8	6	"
ME-M10-R3	"	3/8"	"	"	"	"	10	"
ME-M10-R4	"	1/2"	"	"	27.8	"	12	"
ME-M12-R2	12x10	1/4"	24	48.5	26.5	10	6	18
ME-M12-R3	"	3/8"	"	"	"	"	10	"
ME-M12-R4	"	1/2"	"	"	30.3	"	12	"
ME-M12-R6	"	3/4"	"	"	30.6	"	16	"
ME-M19-R4	19x15.8	1/2"	32	61.5	34.8	16	12	27
ME-M19-R6	"	3/4"	"	"	37.1	"	16	"
ME-M25-R6	25x22	"	41	73.1	42.1	22	"	34
ME-M25-R8	"	1"	"	"	46.4	"	22	"

INCH+PT TYPE

	T	PT	HEX	(A)	B	ØC	ØD	W
ME-H1-R1	3.18X2.18	1/8"	11	25.8	17.5	2	3	7.6
ME-H1-R2	"	1/4"	"	"	21.5	"	6	"
ME-H2-R1	6.35X3.95	1/8"	16	34	18	4	3	10
ME-H2-R2	"	1/4"	"	"	22	"	6	"
ME-H2-R3	"	3/8"	"	"	"	"	10	"
ME-H3-R2	9.53X6.35	1/4"	19	40.2	24	6.3	6	14
ME-H3-R3	"	3/8"	"	"	"	"	10	"
ME-H3-R4	"	1/2"	"	"	27.8	"	12	"
ME-H4-R2	12.7X9.53	1/4"	24	48.5	26.5	10	6	18
ME-H4-R3	"	3/8"	"	"	"	"	10	"
ME-H4-R4	"	1/2"	"	"	30.3	"	12	"
ME-H4-R6	"	3/4"	"	"	30.6	"	16	"
ME-H6-R4	19.05X15.8	1/2"	32	61.5	34.8	16	12	27
ME-H6-R6	"	3/4"	"	"	37.1	"	16	"
ME-H8-R6	25.4X22.2	"	41	73.1	42.1	22	"	34
ME-H8-R8	"	1"	"	"	46.4	"	22	"

UNIT:MM

全ての寸法は参考値です
 Tは適用チューブの外径と内径を示します
 Wは本体2面の幅を示します