


FE フィメールエルボ

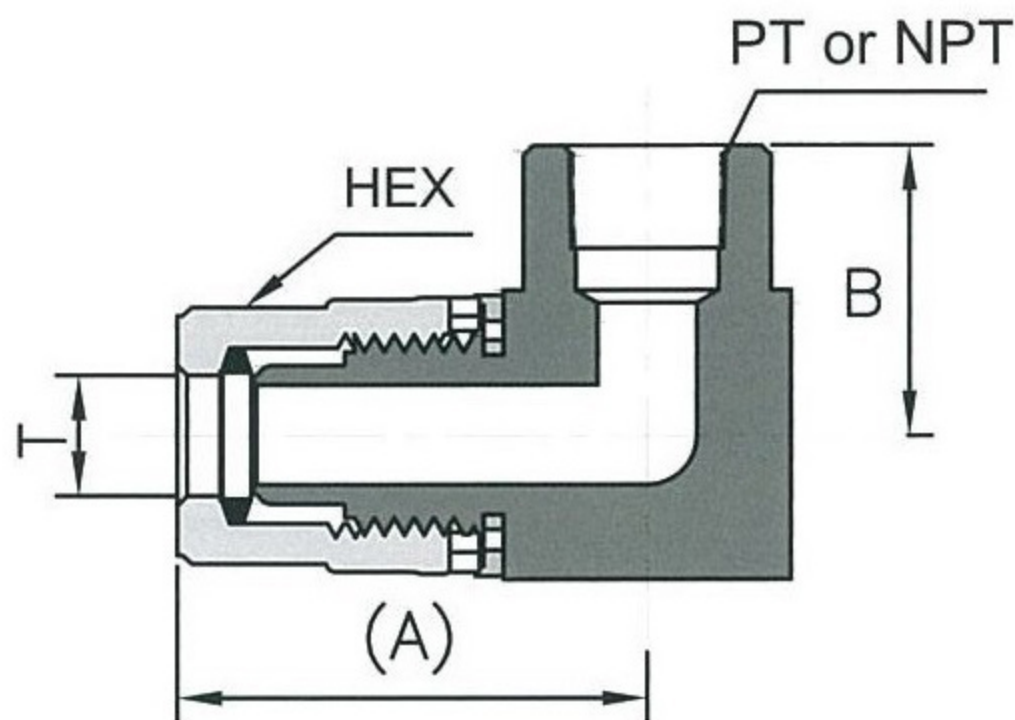

INCH TYPE

	T	NPT	HEX	(A)	B	W
FE-H2-N1	6.35X3.95	1/8"	16	33.5	21	20
FE-H2-N2	"	1/4"	"	35	24	23
FE-H2-N3	"	3/8"	"	36.5	24.5	26
FE-H3-N2	9.53X6.35	1/4"	19	39.2	25.5	23
FE-H3-N3	"	3/8"	"	40.7	26	26
FE-H3-N4	"	1/2"	"	43.9	30	32.5
FE-H4-N2	12.7X9.53	1/4"	24	47.5	28.5	29
FE-H4-N3	"	3/8"	"	"	29	"
FE-H4-N4	"	1/2"	"	49.3	33	32.5
FE-H6-N4	19.05X15.8	"	32	60	37.5	38
FE-H6-N6	"	3/4"	"	62	38	42
FE-H8-N6	25.4X22.2	"	41	72.5	43.5	49
FE-H8-N8	"	1"	"	75	47.5	54

MM TYPE

	T	PT	HEX	(A)	B	W
FE-M6-R1	6X4	1/8"	16	33.5	21	20
FE-M6-R2	"	1/4"	"	35	24	23
FE-M6-R3	"	3/8"	"	36.5	24.5	26
FE-M8-R1	8X6	1/8"	19	37.7	21	20
FE-M8-R2	"	1/4"	"	39.2	25.5	23
FE-M8-R3	"	3/8"	"	40.7	26	26
FE-M10-R2	10X8	1/4"	"	39.2	25.5	23
FE-M10-R3	"	3/8"	"	40.7	26	26
FE-M10-R4	"	1/2"	"	43.4	30	32.5
FE-M12-R2	12X10	1/4"	24	62	43	29
FE-M12-R3	"	3/8"	"	"	43.5	"
FE-M12-R4	"	1/2"	"	65.5	47.5	32.5
FE-M19-R4	19X15.8	1/2"	32	60	37.5	38
FE-M19-R6	"	3/4"	"	62	38	42
FE-M25-R6	25X22	3/4"	41	72.5	43.5	49
FE-M25-R8	"	1"	"	75	47.5	54

UNIT:MM

全ての寸法は参考値です
 Tは適用チューブの外径と内径を示します
 Wは本体2面の幅を示します