


RUE レデュースングユニオンエルボ

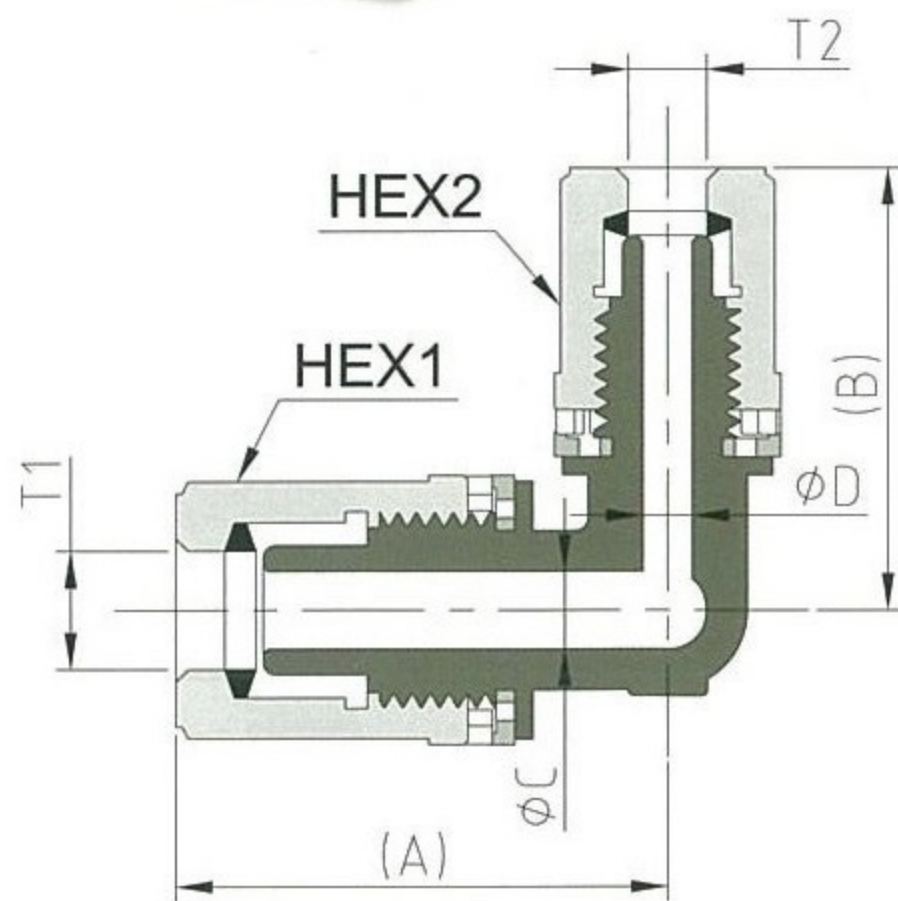

INCH TYPE

	T1	T2	HEX1	HEX2	(A)	(B)	ØC	ØD	W
RUE-H2-H1	6.35X3.95	3.18X2.18	16	11	34	28.3	4	2	10
RUE-H3-H2	9.53X6.35	6.35X3.95	19	16	40.2	36	6.3	4	14
RUE-H4-H2	12.7X9.53	"	24	"	48.5	38.5	10	"	18
RUE-H4-H3	"	9.53X6.35	"	19	"	42.7	"	6.3	"
RUE-H6-H3	19.05X15.8	"	32	"	61.5	47.2	16	"	27
RUE-H6-H4	"	12.7X9.53	"	24	"	53	"	10	"
RUE-H8-H4	25.4X22.2	"	41	"	73.5	58	22	"	34
RUE-H8-H6	"	19.05X15.8	"	32	"	66.5	"	16	"
RUE-H10-H6	31.8X28	19.05X15.8	50	32	97.3	72.5	28	16	40
RUE-H10-H8	"	25.4X22.2	"	41	"	79.5	"	22	"
RUE-H12-H6	38.1X33.7	19.05X15.8	60	32	108.5	77.3	33.7	16	48
RUE-H12-H8	"	25.4X22.2	"	41	"	84.3	"	22	"
RUE-H12-H10	"	31.8X28	"	50	"	102.2	"	28	"

MM TYPE

	T1	T2	HEX1	HEX2	(A)	(B)	ØC	ØD	W
RUE-M6-M3	6X4	3X2	16	11	34	28.3	4	2	10
RUE-M6-M4	"	4X3	"	"	"	"	4	3	"
RUE-M8-M6	8X6	6X4	19	16	40.2	36	6.3	4	14
RUE-M10-M6	10X8	"	"	"	"	"	8	"	"
RUE-M10-M8	"	8X6	"	19	"	40.2	"	6.3	"
RUE-M12-M6	12X10	6X4	24	16	48.5	38.5	10	4	18
RUE-M12-M8	"	8X6	"	19	"	42.7	"	6.3	"
RUE-M12-M10	"	10X8	"	"	"	"	"	8	"
RUE-M19-M10	19X15.8	"	32	"	61.5	47.2	16	"	27
RUE-M19-M12	"	12X10	"	24	"	53	"	10	"
RUE-M25-M12	25X22	"	41	"	73.5	58	22	"	34
RUE-M25-M19	"	19X15.8	"	32	"	66.5	"	16	"

UNIT:MM

全ての寸法は参考値です

T1 "T2"は適用チューブの外径と内径を示します

Wは本体2面の幅を示します