




(JIS マーク認証対象外)

ねじ込み式高圧継手 (ねじ規格 JIS B0203): ハーフカップリング

High Pressure Fittings with threads: HALF COUPLING

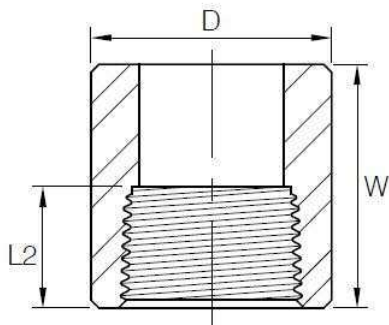

S80

単位: mm

径の呼び		長さ W	ねじの長さ L2	外径 D
A	B			
DN	Nom. Pipe Size			
6	1/8	28	8.8	19
8	1/4	28	11.4	22
10	3/8	33	12.4	25
15	1/2	37	14.9	32
20	3/4	42	16.8	38
25	1	45	19.6	46
32	1-1/4	52	21.9	55
40	1-1/2	56	22.7	65
50	2	66	23.9	75
65	2-1/2	73	30.5	95
80	3	80	32.8	110

S160

単位: mm

径の呼び		長さ W	ねじの長さ L2	外径 D
A	B			
DN	Nom. Pipe Size			
15	1/2	37	14.9	35
20	3/4	42	16.8	42
25	1	45	19.6	51
32	1-1/4	52	21.9	60
40	1-1/2	56	22.7	68
50	2	66	23.9	84
65	2-1/2	73	30.5	105
80	3	80	32.8	118

備考: 製品は JIS B2316 に準拠。ねじは JIS B0203 或は JIS B0202 に準拠。

REMARK: Products refer to JIS B2316; Threads refer to JIS B0203 or JIS B0202.